Panel Cutting
Quality Inspection Standard

DOCUMENT NUMBER	VERSION	EFFECTIVE DATE
YS-ZZZX-004	A/0	21 March 2026

Equipment: Electronic panel saw and routing machine

Operator requirements: Operators must be trained and qualified, and must be proficient in equipment operation, equipment performance, safety precautions and protective measures.

Pre-operation inspection

1. Verify that the panel material, brand, thickness, color and specification match the Order Details.
2. Panels must be free from visible scratches, score marks, pressure marks, deformation, impact damage, cracks, delamination and other damage.

Workmanship requirements

1. Cut edges must be flat and smooth, with no chipping, darkened edges, burrs, saw marks or stepped cuts.
2. The cut face must be perpendicular to the panel surface at 90 degrees.
3. Use the side pusher for every panel cut on the electronic panel saw.

Dimensional tolerances

Inspection item	Panel size	Permitted deviation
Length and width	Within 1 m	+/- 0.2 mm
Length and width	1 to 2 m	+/- 0.5 mm
Diagonal	Within 1 m	+/- 0.2 mm
Diagonal	Within 2 m	+/- 0.5 mm

Inspection and Release

Panel Cutting

Inspection and release requirements

1. Inspect the first piece in accordance with the Management Rules for First-piece Inspection. Check dimensions, quality, specification, color and grain against the Order Details. Begin batch processing only after the first piece passes inspection.
2. Carry out random inspections at least five times during production. Stop processing immediately if a problem is found.
3. Inspect at least three finished pieces from each order. Release the order to the next operation only after the inspection passes.

Stacking and panel protection

1. Do not place processed panels directly on the floor. Place them on support boards and keep them within the support-board footprint.
2. Keep hard objects out of stacked panels to prevent scratches to the panel surfaces.
3. Stack panels no higher than 0.8 m.
4. Transfer complete sets to the designated lane for the next operation according to the panel processing route.


Document control

Prepared by / Date	Reviewed by / Date	Approved by / Date

This document and its contents must not be disclosed to unauthorized organizations or individuals without prior written permission from CIRMANO.

Inspection Examples

Panel Cutting / Acceptance and defect references

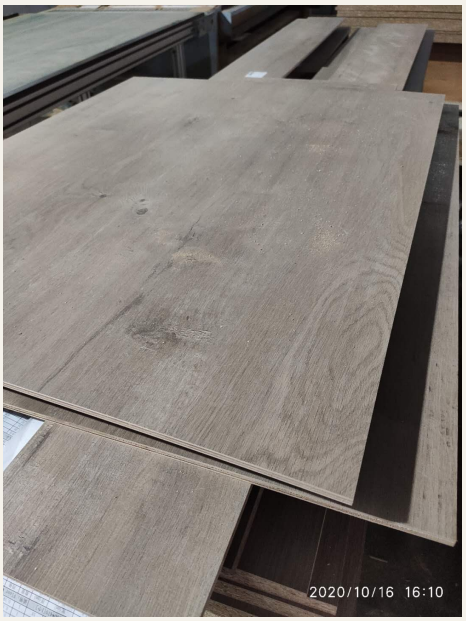

ACCEPTABLE

Acceptable panel cutting



ACCEPTABLE

Acceptable panel cutting



NONCONFORMING

Edge chipping



NONCONFORMING

Broken corner

Inspection Examples

Panel Cutting / Acceptance and defect references



NONCONFORMING

Surface scratches



NONCONFORMING

Panel surface defect



NONCONFORMING

Surface scratches



NONCONFORMING

Surface scratches

Inspection Examples

Panel Cutting / Acceptance and defect references



NONCONFORMING

Surface scratches



NONCONFORMING

Surface scratches



ACCEPTABLE

Correct panel stacking



NONCONFORMING

Incorrect panel stacking