Edge Banding
Quality Inspection Standard

DOCUMENT NUMBER	VERSION	EFFECTIVE DATE
YS-ZZZX-005	A/0	21 March 2026

Equipment: Edge banding machine

Operator requirements: Operators must be trained and qualified, and must be proficient in equipment operation, equipment performance, safety precautions and protective measures.

Pre-operation inspection

1. Check incoming panels for slanted edges, steps, chipping and impact damage. Check whether pre-milling is required by the process and has been carried out as required.

Workmanship requirements

1. Edge banding must be flat and firmly bonded, with no debonding or chipping. There must be no missed or incomplete banding, misalignment, uneven edge height or obvious glue lines. Rounded corners must be smooth and evenly proportioned.
2. End trimming must be complete and neat. The banding must be smooth and even, with no excess adhesive.
3. On curved workpieces, locate the banding joint away from prominent front-facing areas and make the joint flush.
4. Finished workpieces must meet the specified dimensions and the requirements of the untrimmed reference sample.
5. Banding must be neat, with no tearing or burrs. Edges must feel smooth to the touch.
6. The edge band model, color and specification must match the process requirements.

Inspection and Release

Edge Banding

Inspection and release requirements

1. Inspect the first edge-banded piece before batch processing. Begin batch processing only after the first piece passes inspection.
2. The lead operator and assistant must carry out random inspections during processing to verify banding quality.
3. Inspect at least 5% of completed workpieces. Release them to the next operation only after the inspection passes.

Stacking and panel protection

1. Do not place processed panels directly on the floor. Place them on support boards and keep them within the support-board footprint.
2. Keep stacked panels clean and free from hard objects between panels to prevent surface scratches.
3. Stack panels no higher than 0.8 m.
4. Transfer complete sets to the designated lane for the next operation according to the panel processing route.

Document control

Prepared by / Date	Reviewed by / Date	Approved by / Date

This document and its contents must not be disclosed to unauthorized organizations or individuals without prior written permission from CIRMANO.

Inspection Examples

Edge Banding / Acceptance and defect references



ACCEPTABLE

Acceptable edge banding



ACCEPTABLE

Acceptable edge banding



NONCONFORMING

Incomplete edge banding




NONCONFORMING

Dark line along the banding

Inspection Examples

Edge Banding / Acceptance and defect references

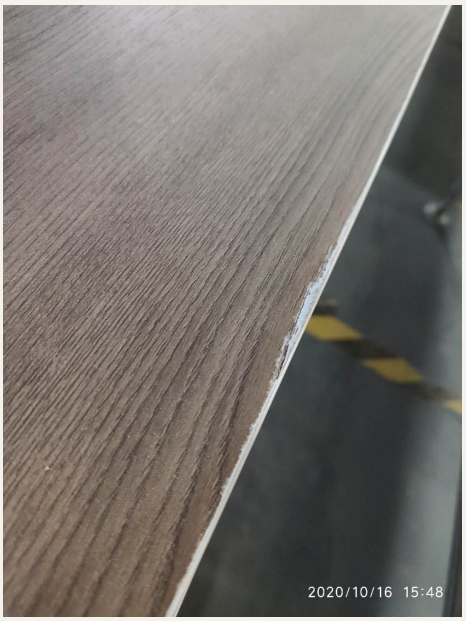


NONCONFORMING

Panel damaged during banding




NONCONFORMING

Excessive banding gap

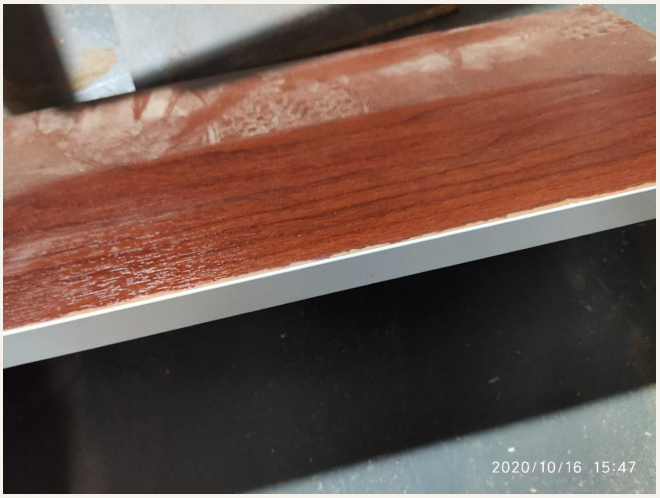

NONCONFORMING

Incorrect banding color

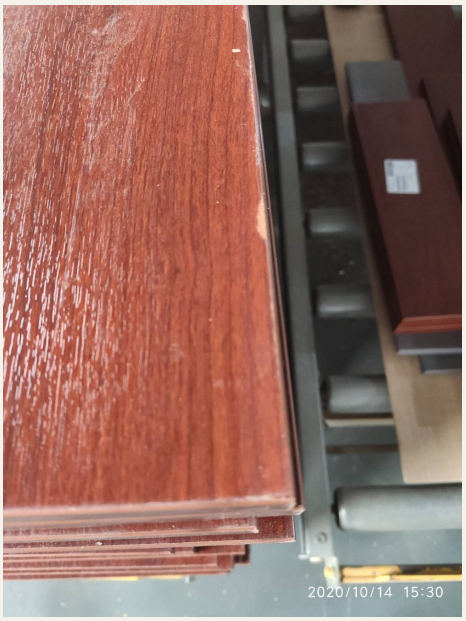

NONCONFORMING

Panel damaged during banding


Inspection Examples

Edge Banding / Acceptance and defect references



NONCONFORMING

Edge band detachment

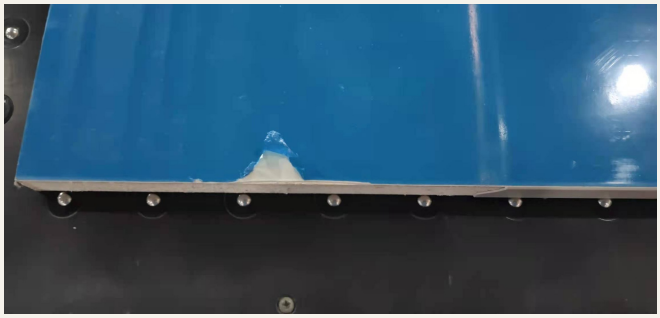


NONCONFORMING

Swollen panel scraped during processing



NONCONFORMING

Banding applied to the wrong edge

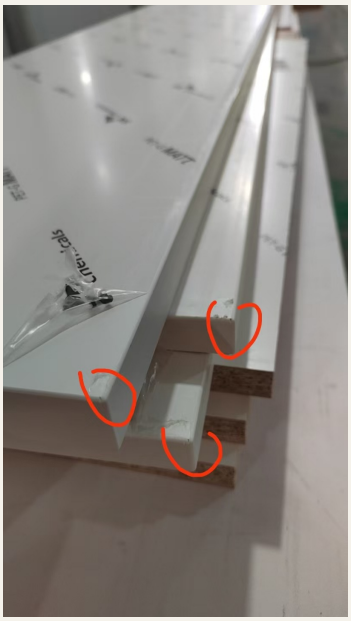

NONCONFORMING

Chipped corner radius